

“QUOTATION FOR ON-GRID SOLAR POWER PLANT”


Quotation Number: NE/QT/25-26/136

Date: 25/12/2025

Project Capacity: 200kW



About Us:



JRR Energies

Plot No. 52, Electronic Complex, Pardesipura, Indore, Madhya Pradesh – 452010

Contact: 9752833433 ;Email: jrr_solar_energies@gmail.com

At JRR Energies, we are dedicated to advancing renewable energy adoption across India. For over 20 years, we have been manufacturing and supplying high quality Solar Photovoltaic and Solar Thermal devices, including solar water heaters, lanterns, home lighting systems, streetlights, cookers, pumps, and other energy-efficient products.

We are an MNRE-approved vendor and registered suppliers with MPEB, MPUVN, CREADA, and several state renewable energy departments. With a strong technical team and extensive experience in design, installation, and aftersales service, we provide end-to-end solar solutions — from site survey and design to commissioning and maintenance.

Our expertise spans solar power plants, solar effluent evaporation systems, air/space heating solutions, and solar-powered utilities. Backed by a consortium of specialists in marketing, sales, and engineering, we ensure reliable project execution and long-term customer satisfaction.

At JRR Energies, our mission is simple: to deliver sustainable, cost-effective, and future-ready solar solutions that empower individuals, businesses, and communities.



Scope Matrix:

JRR Energies

Plot No. 52, Electronic Complex, Pardesipura, Indore, Madhya Pradesh – 452010
Contact: 9752833433 ;Email: jrr_solar_energies@gmail.com

1. Our Scope of Work (JRR Energies)

✓ Design, Supply, Installation, Testing & Commissioning

- ❖ Conduct a detailed site survey, including accurate measurements, photographs, and site-specific data collection for complete system design.
- ❖ Prepare comprehensive system designs covering civil, structural, electrical, and mechanical components, along with construction drawings and technical specifications.
- ❖ Procure all required equipment and materials and ensure timely delivery to the project site.
- ❖ Execute full system installation as per approved design and standards.
- ❖ Test and verify all electrical components in compliance with manufacturer's guidelines.
- ❖ Handle liaison work, net-metering applications, calibration fees, and approvals from DISCOM.
- ❖ Arrange lodging, transportation, and meals for the work crew outside the client premises.
- ❖ Commission the system to ensure full operational readiness.

2. Client's Scope of Work

✓ Support & Facilitation

- ❖ Provide access to the site for delivery of equipment and materials before and during project execution.
- ❖ Review and approve all system designs (civil, structural, electrical, and mechanical), including construction drawings and specifications.
- ❖ Provide a secure and suitable storage area for equipment and materials at site.
 - ❖ Allow uninterrupted access to the work crew, including weekends if required.
- ❖ Facilitate coordination with client's engineering staff or consultants as and when required.
- ❖ After commissioning and handover, ensure regular (weekly) cleaning of solar modules through an appropriate cleaning arrangement.
- ❖ Manage gate pass formalities for inbound delivery of materials and outbound movement of equipment or crew at the site entry/exit points.

Bill of Quantity (BOQ):

JRR Energies

Plot No. 52, Electronic Complex, Pardesipura, Indore, Madhya Pradesh – 452010
Contact: 9752833433 ;Email: jrr_solar_energies@gmail.com

S. No.	Component	Description	Quantity	Make
1.	Solar PV Modules	High-efficiency Solar PV Modules complying with IEC 61215 / IS 14286 (Design Qualification & Type Approval), IEC 61730 (Part 1 : Construction, Part 2: Testing & Safety), and IEC 61701 (Salt Mist Corrosion).	325-365 Nos.	Polycab /Luminous /Macwin
2.	On-Grid Inverter	Grid-tied inverter complying with IEC 61683 / IS 61683 (Efficiency Measurements) and IEC 60068 (Environmental Testing). Designed for reliable grid synchronization and high conversion efficiency.	2 No.	Polycab /Luminous
3.	Module Mounting Structure	Alu. mono-rail (80+ micron coating) designed for durability, corrosion resistance and high wind pressure.	As per Site Design	JSW/TATA
4.	ACDB (AC Distribution Box)	Inverter output combining box with 4pole MCCb, IP65 protection, indication lamp, and necessary accessories.	As per Site Design	Havells/Polycab
5.	DCDB (DC Distribution Box)	Weatherproof IP65 polycarbonate enclosure with protective devices for DC circuits.	As per Site Design	Havells/Polycab
6.	Earthing Protection	Chemical earthing with 3 x 1m long copper rods and chemical compound.	As per Site Design	SABO / Protech / Truepower or Equivalent
7.	Lightning Arrester	ESE (Early Streamer Emission) based lightning arrester covering 65m radius with down conductor and 5m base arrester for mocomplete installation protection	As per Site Design	Truepower / SABO or Equivalent
8.	MC4 Connector (Pair: Male & Female)	UV-resistant, IP68-rated, TUV-certified connectors for safe and reliable DC connections.	As per Design	Elmex / Phoenix or Equivalent
9.	DC Cables	UV-resistant solar-grade DC cables (4mm ² type-1) suitable for outdoor installations.	As per Design	Polycab
10.	AC Cable	High-quality AC power cable (50mm ² x 3.5 core) for grid and load connections	As per Design	RR Kabel /Havells
11.	Other Accessories	Sprinkler, Pipes, Motor/pump, Cable ties, lugs, saddles, flexible pipes, PVC conduits, cable trays, SS bolts, nuts, washers, and fasteners for complete system installation.	As per Design	Standard Make

JRR Energies

Plot No. 52, Electronic Complex, Pardesipura, Indore, Madhya Pradesh – 452010
Contact: 9752833433 ;Email: jrr_solar_energies@gmail.com

Commercial Offer:

S. No.	Product / Description	Amount (INR)
1.	Supply & Installation of 200kW Solar System (Includes Solar PV Modules, Grid-Tied Inverters, Mounting Structures, Cables, Earthing, Connectors, Junction Boxes, Energy Meter, Installation & Commissioning @ ₹26.22	₹52,44,261
2.	GST	₹4,66,739
	Grand Total	₹57,11,000


Return On Investment (ROI):

Particulars	Value
Plant Capacity	200 kW
Total Investment	₹57,11,000
Ave. Generation Factor	4 units per kW per day (site dependent)
Ave. Daily Generation	800 units
Ave. Yearly Generation	288000 units
Performance Ratio (PR)	75-80% (depending on site & installation quality)
Ave. Tariff Rate (per unit)	₹7.0/ unit
Estimated Yearly Savings	₹20,16,000
Estimated Payback Period (ROI)	2.5 - 3 years

Year	Cumulative Generation (Units)	Cumulative Savings
1	288000	₹20,16,000
2	576000	₹40,32,000
3	864000	₹60,48,000

Note: The tariff rates used in the above calculation is an **assumed value** and does not represent the actual electricity tariff. The actual savings/returns will vary depending on the applicable tariff rates in the customer's electricity bill.

Terms & Conditions:



JRR Energies

Plot No. 52, Electronic Complex, Pardesipura, Indore, Madhya Pradesh – 452010
Contact: 9752833433 ;Email: jrr_solar_enegies@gmail.com

1. Warranty & Servicing

- ❖ **PV Modules:** 25 years linear power warranty (as per manufacturer policy).
- ❖ **Solar Inverter:** 08 years warranty (as per manufacturer policy).
- ❖ **Mounting Structure:** 1 year manufacturer warranty.
- ❖ **Other Accessories:** As per respective manufacturer's warranty.
- ❖ Warranty validity starts from the date of invoice and is subject to manufacturer's terms & conditions.
- ❖ Original bill/invoice copy is mandatory to claim warranty.
- ❖ Nikita Electronics will assist in raising service requests and coordinating with the manufacturer; however, warranty execution remains the manufacturer's responsibility.

2. Transportation & Insurance

- ❖ Delivery shall be made by road transport to the project site.
- ❖ Transit insurance is available upon client request; charges shall be borne by the client.

3. Payment Terms

- ❖ 50% advance along with purchase order/confirmation.
- ❖ 45% payable before or at the time of delivery/supply.
- ❖ 05% balance payable after installation.
- ❖ Payments shall be made via **RTGS/NEFT** only.

Bank Details:

4. ❖ Any	Field	Information	Variation revision or addition in
	Account Name	JRR Energies	
	Bank Name	SBI	
	Branch	Indore	
	Account Number	XXXXXXXXXX	
	IFSC Code	XXXXXXXX	

the approved product specifications or scope of work, arising from site conditions or client requirements, will be executed at the sole discretion of JRR Energies.

JRR Energies

Plot No. 52, Electronic Complex, Pardesipura, Indore, Madhya Pradesh – 452010
Contact: 9752833433 ;Email: jrr_solar_energies@gmail.com

- ❖ Any resulting additional costs shall be reflected in the final invoice.
- ❖ Capacity variation costs (if any) after system design approval shall also be charged additionally.

5. Consumables

- ❖ Consumables such as surge protection devices (SPD), fuses, nuts & bolts, fasteners, etc., are not covered under warranty and will not be replaced free of charge.
- ❖ Replacement, if required, will be chargeable.

6. Delivery & Installation

- ❖ Expected delivery timeline: 4–6 weeks from order confirmation and receipt of advance, subject to site readiness.
- ❖ Installation schedule will depend on site conditions and client's timely cooperation (access, permits, storage space, etc.).

7. Other Terms

- ❖ Quotation validity: **7 days** from the date of issue.
- ❖ Prices are for SITC (Supply, Installation, Testing & Commissioning) only.
- ❖ Transportation and freight are exclusive of the quoted price unless otherwise specified.
- ❖ Interest @ 2% per month may apply to overdue payments.
- ❖ Ownership of equipment remains with JRR Energies until full payment is received.

8. Client Responsibilities

- ❖ Provide access to the site for delivery of equipment and installation.
- ❖ Ensure suitable and secure storage space for materials and equipment.
- ❖ Facilitate approvals, permits, and gate passes for inward/outward movement of materials and workforce.
- ❖ Provide water and electricity at site (if required for installation work).
- ❖ Ensure regular cleaning and maintenance of solar panels after project handover.

9. Force Majeure

- ❖ JRR Energies shall not be held liable for any delay or failure in performance caused by events beyond its reasonable control, including but not limited to natural disasters, strikes, government actions, lockdowns, or DISCOM approval delays.

JRR Energies

Plot No. 52, Electronic Complex, Pardesipura, Indore, Madhya Pradesh – 452010
Contact: 9752833433 ;Email: jrr_solar_energies@gmail.com

10. Dispute Resolution & Jurisdiction

- ❖ Any disputes shall first be attempted to be resolved amicably through mutual discussions or arbitration.
- ❖ If unresolved, disputes will be subject to the jurisdiction of Indore, Madhya Pradesh courts only.



Note:-

Once the solar installation is complete, all subsequent processes such as meter integration, energy generation readings, and related approvals are the sole responsibility of the DISCOM/MPEB. JRR Energies has no control over these procedures, and any delays or issues arising from the concerned government authorities are beyond our responsibility.



JRR Energies

Plot No. 52, Electronic Complex, Pardesipura, Indore, Madhya Pradesh – 452010
Contact: 9752833433 ;Email: jrr_solar_enegies@gmail.com

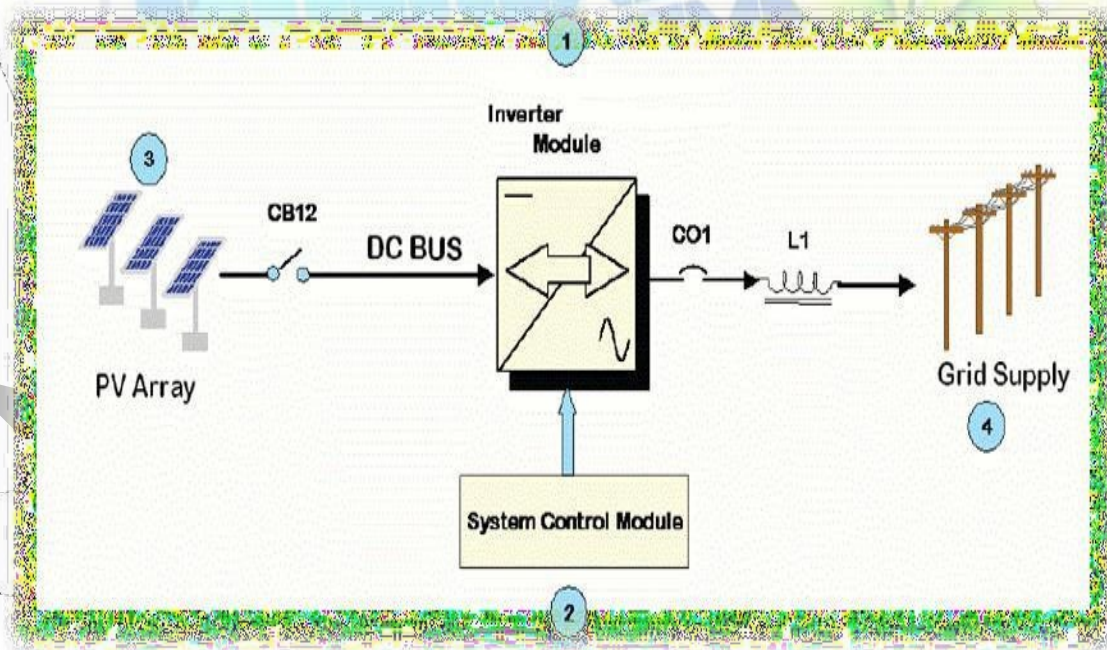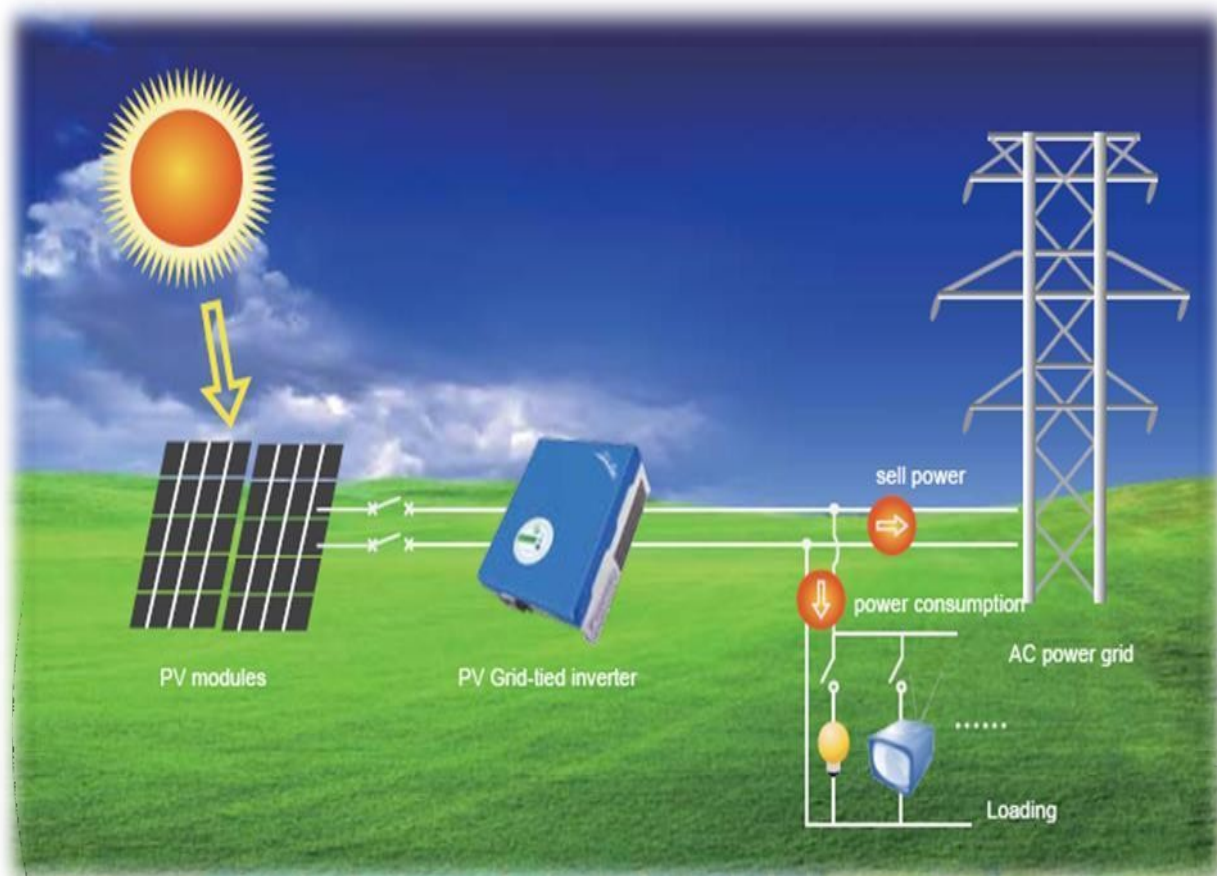

Dear Sir,

JRR Energies

Plot No. 52, Electronic Complex, Pardesipura, Indore, Madhya Pradesh – 452010

Contact: 9752833433 ;Email: jrr_solar_energies@gmail.com

We are pleased to refer to your requirements for Solar Power Generating components as per your enquiry. Please find enclosed herewith our budgetary offer for the requirement along with accessories for your kind consideration.

Please note this offer is based on the initial technical requirements shared by you with us. We hope that same is in line with your requirement.

If you require any further Information/clarification, kindly feel free to contact us. Thanking and assuring you of our best services at all times.

Regards,

Shashank Rajguru

JRR Energies

Plot No. 52, Electronic Complex, Pardesipura, Indore, Madhya Pradesh – 452010
Contact: 9752833433 ;Email: jrr_solar_energies@gmail.com